


Drains PP-HM à trous, fiche technique

Tuyau de drainage en polypropylène à haut module d'élasticité, avec emboîtement et joint


Conformes aux normes : EN 1852 - R 592012 - Qplus 15009

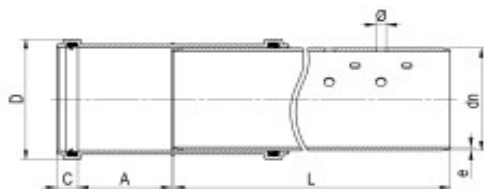

SN4 / SDR33 / S16 Couleur caramel, sans lignes

A trous

dn mm	e mm	D mm	C mm	A mm	L mm	Angle en °	Ø mm	Entrée cm ² /m	Poids kg/m	Palette m	Article N°
110	3.40	129.20	20.00	51.00	6'000	140	12	68	1.120	270	PPTPS041106
125	3.90	147.30	23.00	56.00	6'000	140	12	68	1.440	192	PPTPS041256
160	4.90	186.30	29.00	65.00	6'000	140	12	68	1.310	108	PPTPS041606
200	6.20	230.60	36.00	77.00	6'000	140	16	121	3.660	90	PPTPS042006

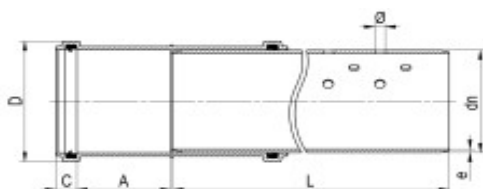

SN8 / SDR29 / S14 Couleur caramel, lignes brun clair

A trous

dn mm	e mm	D mm	C mm	A mm	L mm	Angle en °	Ø mm	Entrée cm ² /m	Poids kg/m	Palette m	Article N°
110	3.80	129.20	20.00	51.00	6'000	140	12	68	1.230	270	PPTPS081106
125	4.30	147.30	23.00	56.00	6'000	140	12	68	1.590	192	PPTPS081256
160	5.50	186.30	29.00	65.00	6'000	140	12	68	2.590	108	PPTPS081606
200	6.90	230.60	36.00	77.00	6'000	140	16	121	4.030	90	PPTPS082006
250	8.60	290.80	48.00	90.00	6'000	140	16	121	6.270	48	PPTPS082506
315	10.80	361.10	57.00	108.00	6'000	140	16	121	9.880	36	PPTPS083156
400	13.70	455.30	65.00	121.00	6'000	140	16	121	15.890	24	PPTPS084006

Ø 110 et 125 mm : 4 trous par rangée

Ø 160 à 400 mm : 6 trous par rangée

Valeurs indicatives, informatives et non contractuelles.